



Materials Technology

Resistance Testing


CONFORMS TO QATM 810.

HIGH FLOWING MEDIA

Resistance is the pressure drop in mm of water (mm H₂O) of air passing through a filter at a face velocity of 5.3 cm per second. The face velocity is calculated by dividing the airflow rate by the effective filter area. The airflow is adjusted to 5.3 cm per second. The resistance is then read on the pressure gauge.

Standard test used to measure resistance of high flowing media.

APPARATUS FOR RESISTANCE TESTING

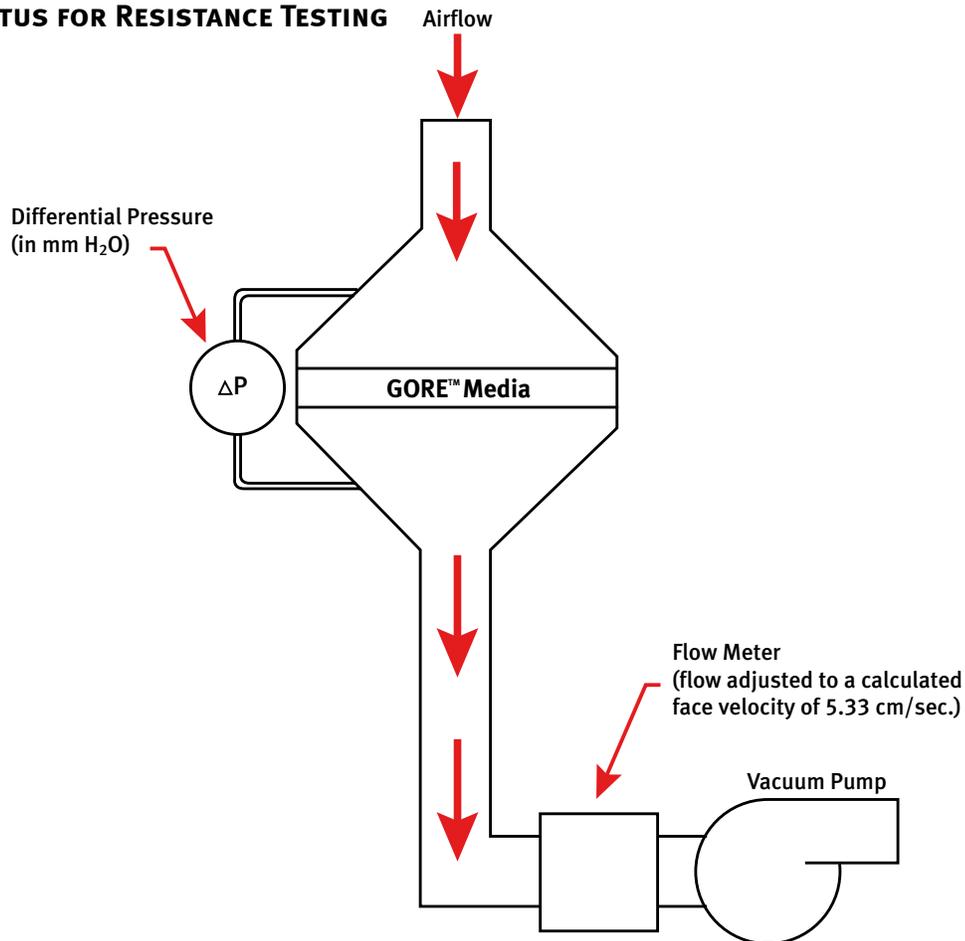

W. L. GORE & ASSOCIATES, INC.
401 Airport Road • Elkton, MD 21921 • USA
Phone: 1.410.392.4440 • Toll-Free: 1.800.455.4670
Fax: 410.506.7993

gore.com

FOR INDUSTRIAL USE ONLY. Not for use in food, drug, cosmetic or medical device manufacturing, processing, or packaging operations.

GORE and design are trademarks of W. L. Gore & Associates. All rights reserved.
© 2011 W. L. Gore & Associates, Inc. Printed in USA.

